


Crescent

DA-SDI-DP

SDI to Display Port 1.2 converter

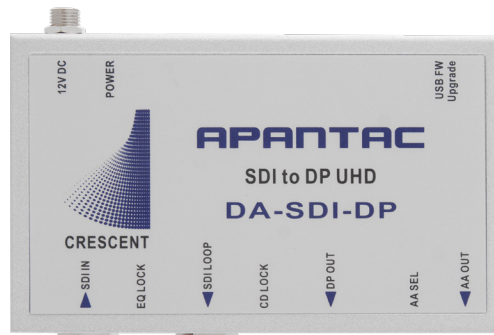

DA-SDI-DP

Key Features

- Compact SDI to Display Port converter
- Support up to 12G SDI input (not SD-SDI)
- Display Port output
- Analog stereo output
- Rotary selector (0-7) to select the audio pair out
- Rotary selector (8 to C) displays ATC, closed captions (608/708/OP47)
- 12V DC

Front View



- 12V DC
- Power LED
- USB for FW Upgrade

Rear View



- SDI In
- SDI Loop out
- LED Status
- DP output
- Rotary switch for audio pair selection, ATC and 608, 708OP47 closed captions and analog audio breakout

Related Products

DA-SDI-HDTV-II
SDI to HDMI converter

DA-HDTV-SDI-UHD
12G to HDMI 2.0 converter

Specifications

Model	DA-SDI-DP
Description	SDI to DP converter
Inputs	1 x SDI up to 12G
Outputs	1 x SDI loop-out, 1 x DP 1.2
Audio	AA output with rotary selector for each pair
Power	12V 1A
Weight	1.0 lb (0.45 kg)
Dimension	112 x 74 x 26 mm (W x D x H)

Crescent

DA-SDI-DP

SUPPORTED SIGNAL TYPE/FORMATS		
Supported Resolution	SDI Loop Output	DP Output
3840x2160p 23.98Hz	V	V
3840x2160p 24Hz	V	V
3840x2160p 25Hz	V	V
3840x2160p 29.97Hz	V	V
3840x2160p 30Hz	V	V
3840x2160p 50Hz	V	V
3840x2160p 59.94Hz	V	V
3840x2160p 60Hz	V	V
1920x1080P 23.98Hz	V	V
1920x1080P 24Hz	V	V
1920x1080P 25Hz	V	V
1920x1080P 29.97Hz	V	V
1920x1080P 30Hz	V	V
1920x1080P 25psf	V	V
1920x1080P 29.97psf	V	V
1920x1080P 30psf	V	V
1920x1080P 50Hz	V	V
1920x1080P 59.94Hz	V	V
1920x1080P 60Hz	V	V
1920x1080i 50Hz	V	V
1920x1080i 59.94Hz	V	V
1920x1080i 50Hz	V	V
1920x1080i 60Hz	V	V
1280x720p 25z Hz	V	V
1280x720p 29.97Hz	V	V
1280x720p 59.97Hz	V	V
1280x720p 60Hz	V	V